



Table de cuisson Ognidove

Freestanding

Code: 5030 241



DETAILS

| Coloring | Black |
|------------------------|---|
| Edge/Installation Type | Freestanding |
| Material | Ceramic glass |
| Supply | 230V - 50.60 Hz |
| Dimensions | 840 x 350 mm |
| Base size | 90cm |
| Heating element | Three zones |
| Notes: | Rounded edges Supplied: Schuko electric plug |
| Total power | 3.500 W |



| Left | Ø 240 mm - 2.200 (3.000)* W | |
|----------------------------|---|--|
| Centre | Ø 145 mm - 1.200 (1.600)* W | |
| Right | Ø 210 mm - 1.500 (2.000)* W | |
| Power settings | 9 power settings per zone + Powerboost | |
| Safety | Safety equipment | |
| Туре | Induction Hob | |
| Type of commands | Touch Control | |
| FEATURES | | |
| End-of-cooking programming | All operations are programmed by means of the touch-control on the glass itself. Each cooking plate is capable of independent programming, and thus the possibility to set different cooking times. | |
| Pause | Useful function that allows you to distract your attention from cooking, interrupting and restoring the settings immediately. | |
| Pot detector | All induction cooker hobs detect the pot resting on them, but they also calculate the area they cover. This system allows the energy to be used even more efficiently. Moreover, the plates switch off automatically when the pot is removed. | |
| | | |

Remote control

The ceiling suction systems and the Maya hoods are equipped with a remote control to easily activate all their functions from any position.

quickly large quantities of water.

Booster function provides increased power to the selected plate. In particular, when the

Booster is activated, the plate works for ten minutes at a very high power that allows to heat


Powerboost



| Safety | All electric cooker hobs feature the most modern and sophisticated safety protections: Centralised power-off function; Child-proof safety lock; Residual heat warning lights. Induction models feature the following functions: Safety System that turn off the hob in the absence of the pot; Overflow detector that automatically turns off the plate in case of liquid overflow; Automatic deactivation to prevent accidents caused by forgetfulness. |
|------------------|--|
| Slider commands | The Slider control allows for extremely quick temperature setting: with a light touch of the finger you may select the desired power level on the TOUCH display. |
| Smart fan system | Correct ventilation is essential for the induction hob to function in the best possible way. The Foster system automatically regulates the amount of ventilation to suit the temperatures reached. |
| Timer | Indipendent timer from the end-of-cooking function. |



TECHNICAL DATA

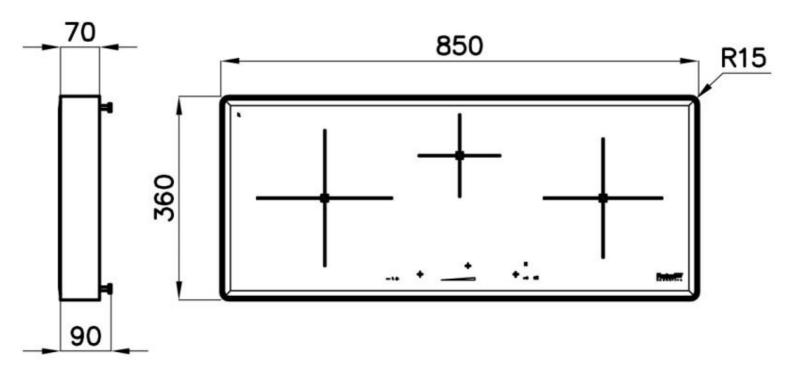



GALLERY

